State of California – A Natural Resources Agency
OFFICE OF ENERGY INFRASTRUCTURE SAFETY
715 P Street, 15th Floor | Sacramento, CA 95814
916.902.6000 | www.energysafety.ca.gov

Gavin Newsom, Governor
Forest Kaser, Director

September 15, 2026

Brandon Tolentino
Vice President, Wildfire and Business Resiliency
Southern California Edison Company
2244 Walnut Grove Ave
Rosemead, CA 91770

NOTICE OF NON-PERFORMANCE

Mr. Tolentino:

Pursuant to Government Code section 15472, et seq, the Office of Energy Infrastructure Safety (Energy Safety) has conducted an inspection of work completed by Southern California Edison Company (SCE) in accordance with its 2025 Wildfire Mitigation Plan (WMP) and determined the existence of non-performance requiring correction. Energy Safety therefore issues SCE a Notice of Non-Performance (NON), identifying non-performance with its approved WMP.

On June 3, 2026, Energy Safety conducted an inspection of Southern California Edison Company's WMP initiatives in the vicinity of the City of Moorpark, California. The inspection report is enclosed herewith. Energy Safety found the following deficiencies:

Deficiency 1. Energy Safety observed that in implementing 2025 WMP initiative Distribution Remediation, SCE failed to complete the remediation related to replacement of damaged anchor, down guys, and queen's post on Structure ID 4650761E, Grid Hardening ID 414903862-4650761E at coordinates 34.27873450824585, -118.90436290369344. Energy Safety considers this non-performance to be in the Minor risk category. SCE must complete a corrective action for this deficiency by 12 months from the date of this notice. [1]

Within 30 days from the issuance date of this NON, the electrical corporation must provide a response advising Energy Safety of corrective actions taken or planned to remedy the identified deficiency or deficiencies.

This response shall be filed in the Energy Safety e-Filing system under the 2025 NON Docket,[2] and the associated file name(s) must begin with the NON identification number.

Prior to its response, the electrical corporation may request an informal conference with Energy Safety for the purpose of disputing any issues raised in this NON no later than 10 business days before the response

[1] Gov. Code section 15475.2(a)(2)
[2] https://efiling.energysafety.ca.gov/EFiling/DocketInformation.aspx?docketnumber=2025%20NON

deadline.[3] Requests for informal conference with Energy Safety must be e-mailed to AssetPerformance@energysafety.ca.gov, with a copy sent to all Energy Safety staff identified in the NON.

Sincerely,

Patrick Doherty

Patrick Doherty
Program Manager | Performance Assessment Division
Office of Energy Infrastructure Safety
Patrick.Doherty@energysafety.ca.gov

Cc:
Peter Van Mieghem, SCE
Peter.Vanmieghem@sce.com
Elizabeth Leano, SCE
Elizabeth.Leano@sce.com
Raghu Rayalu, SCE
Raghu.Rayalu@sce.com
Erick G Sanchez, SCE
Erick.G.Sanchez@sce.com
Sally Jeun, SCE
Sally.Jeun@sce.com
Edward Trinh, SCE
Edward.Trinh@sce.com
Yana Loginova, Energy Safety
Yana.Loginova@energysafety.ca.gov
Keyshawn Ford, Energy Safety
Keyshawn.Ford@energysafety.ca.gov
Samuel Isaiah, Energy Safety
Samuel.Isaiah@energysafety.ca.gov
Shannon Greene, Energy Safety
Shannon.Greene@energysafety.ca.gov
AssetPerformance@energysafety.ca.gov

[3] Energy Safety Performance Guidelines, p. 4

INSPECTION REPORT

Overview

The Office of Energy Infrastructure Safety (Energy Safety) conducts inspections to verify the work performed by an electrical corporation pursuant to an approved Wildfire Mitigation Plan (WMP) or subsequent filing, and to assess general conditions of electrical infrastructure that may adversely affect an electrical corporation's wildfire risk.

A Notice of Non-Performance (NON) is issued for any deficiencies discovered during an inspection related to an electrical corporation's performance of its WMP.

Deficiencies must be corrected in a timely manner. Energy Safety may prescribe a timeframe for resolution of a deficiency.[4] If Energy Safety assigns a risk category to a deficiency, an electrical corporation must correct the deficiency as required per the timelines provided in Table 1.[5]

Table 1. Risk Category and Correction Timelines

Risk Category	Deficiency correction timeline
Severe	• Immediate resolution
Moderate	• 2 months (in High Fire Threat District (HFTD) Tier 3) • 6 months (in HFTD Tier 2) • 6 months (if relevant to worker safety; not in HFTD Tiers 2 or 3)
Minor	• 12 months or resolution scheduled in WMP update

[4] Gov. Code section 15475.2(a)(2)
[5] Energy Safety Performance Guidelines, p. 4

Inspection Summary

Table 2 provides a summary of the selection of the WMP inspection location and initiative. Table 3 provides a summary of the deficiency or deficiencies found during the inspection. Details regarding the inspection that identified the deficiency or deficiencies are provided in the Inspections Details section below.

Table 2. Inspection Location and Initiative Summary

Electrical Corporation:	Southern California Edison Company
Report Number:	PAD_SCE_KSF_20260603_1459
Inspector:	Keyshawn Ford
WMP Year Inspected:	2025
Quarterly Data Report (QDR) Referenced:	Quarter 4 (Q4)
Inspection Selection:	Energy Safety viewed the contents of the Q4 QDR and performed an analysis that resulted in the selection of the WMP initiatives and locations referenced in this report.
Relevant WMP Initiative(s):	8.1.3.1 – Distribution Detailed Inspections and Remediations (IN-1.1)
Date of Inspection:	June 3, 2026
City and/or County of Inspection:	Moorpark, Ventura County
Inspection Purpose:	Assess the accuracy of Southern California Edison Company's QDR data, completeness of its work, and performance of WMP requirements.

Table 3. WMP Inspection Deficiency

Deficiency #	Structure ID	Grid Hardening ID	Lat/Long	HFTD	Initiative Number	Severity	Deficiency Description
Deficiency 1	4650761E	414903862-4650761E	34.27873450824585, -118.90436290369344	Tier 3	8.1.3.1 – Distribution HFRI Inspections and Remediations (IN-1.1)	Minor	Failure to complete the remediation related to replacement of damaged anchor, down guys, and queen's post


Inspection Details

Relevant Requirement:

Southern California Edison Company's WMP states the following regarding initiative number 8.1.3.1 - Distribution Detailed Inspections and Remediations (IN-1.1):

1. "The frequency of [High Fire Risk-Informed Inspections (HFRI)] varies by the location-specific risk… within SCE's [High Fire Risk Area] and emergent conditions. Issues identified by inspectors during the detailed inspections are prioritized for remediation to be completed within [General Order 95] compliance timelines. Remediations can be repairs to or replacements of existing assets depending on asset condition. For example, SCE repairs ground molding with that is found to be broken/damaged with an exposed ground wire at the public level. Also, SCE replaces wood guy guards if found to be missing, damaged or outdated."[6]
2. The following is a workflow diagram from SCE's WMP showing the conditions under which SCE will execute remediations under initiative number 8.1.3.1.[7]

Figure 8-1a - Distribution Detailed Inspections and Remediations Workflow

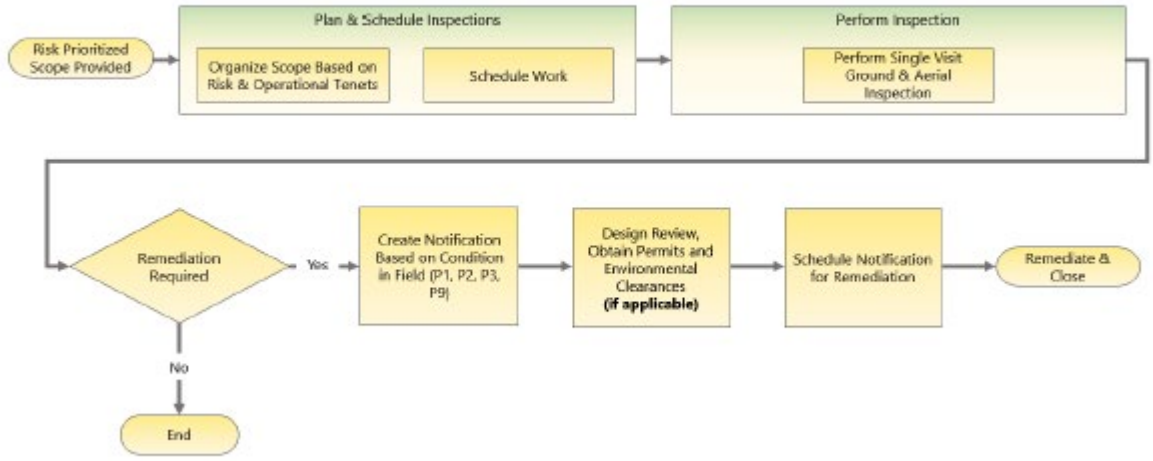

[6] Southern California Edison Company, "2023-25 Wildfire Mitigation Plan," October 26, 2023, p. 284. [Online]. Available: https://efiling.energysafety.ca.gov/eFiling/Getfile.aspx?fileid=55866&shareable=true

[7] Southern California Edison Company, "2023-25 Wildfire Mitigation Plan," October 26, 2023, p. 285. [Online]. Available: https://efiling.energysafety.ca.gov/eFiling/Getfile.aspx?fileid=55866&shareable=true

Findings:

In the 2025 Q4 Quarterly Data Report Submission, Southern California Edison Company reported that work on 8.1.3.1 – Distribution HFRI Inspections and Remediations (IN-1.1) was completed at Structure ID 4650761E, Grid Hardening ID 414903862-4650761E at 11289 West Los Angeles Avenue, Moorpark, CA 93021, USA, at coordinates 34.27873450824585, -118.90436290369344. At this location, the inspector observed that the queen's post was not installed as reported, and that the guy strain rod was hanging from the pole in a limp position. The inspector's observation is documented in Deficiency 1 photographs, which are attachments to this report. Photo numbers Asset Image 1 and Asset Image 2 depict the hanging guy strain rod.

Energy Safety concludes that there is a deficiency because of these facts:

1. Southern California Edison Company's reported that work on WMP initiative 8.1.3.1 – Distribution Detailed Inspections and Remediations was completed at this location.
2. The original notification issued at this location identified that remediation related to replacement of damaged anchor guy, down guys, and queen's post was required.
3. Although the work was reported as complete by SCE, the inspector observed that the guy strain rod was hanging from the pole upon inspection, and no queen's post was observed on Pole 4650761E.

Exhibits

Exhibit A: Photo Log

Structure ID: 4650761E

Deficiency 1

	
General Image 1: Overall Structure	**Asset Image 1:** View of guy strain rod hanging from pole